

commodore semiconductor group NMOS

950 Rittenhouse Rd., Norristown, PA 19403 • Tel.: 215/666-7950 • TWX 510/660-4168

7501

MICROPROCESSOR WITH I/O

DESCRIPTION

The 7501 is a low-cost microcomputer system capable of solving a broad range of small-systems and peripheral-control problems at minimum cost to the user.

An 7-bit Bi-Directional I/O Port is located on-chip with the Output Register at Address 0 0 0 1 and the Data-Direction Register at Address 0 0 0 0. The I/O Port is bit-by-bit programmable.

The Three-State sixteen-bit Address Bus allows Direct Memory Accessing (DMA) and multi-processor systems sharing a common memory.


The internal processor architecture is identical to the MOS Technology 6502 to provide software compatibility.

FEATURES OF THE 7501

- 7-Bit Bi-Directional I/O Port
- Single +5 volt supply
- N channel, silicon gate, depletion load technology
- Eight bit parallel processing
- 56 Instructions
- Decimal and binary arithmetic
- Thirteen addressing modes
- True indexing capability
- Programmable stack pointer
- Variable length stack
- Interrupt capability
- 8 Bit Bi-Directional Data Bus
- Addressable memory range of up to 65K bytes
- Direct memory access capability
- Bus compatible with M6800
- Pipeline architecture
- 1 MHz and 2MHz operation
- Use with any type or speed memory

PIN CONFIGURATION

Pin	Symbol	Pin	Symbol
1	ϕ (IN)	40	RES
2	RDY	39	R/W
3	IRQ	38	DB ₇
4	AEC	37	DB ₆
5	VDD	36	DB ₅
6	A ₁₅	35	DB ₄
7	A ₁₄	34	DB ₃
8	A ₁₃	33	DB ₂
9	A ₁₂	32	DB ₁
10	A ₁₁	31	DB ₀
11	A ₁₀	30	P ₇
12	A ₉	29	P ₆
13	A ₈	28	P ₅
14	A ₇	27	P ₄
15	A ₆	26	P ₃
16	A ₅	25	P ₂
17	A ₄	24	P ₁
18	A ₃	23	P ₀
19	A ₂	22	GATE IN
20	VSS	21	A ₁

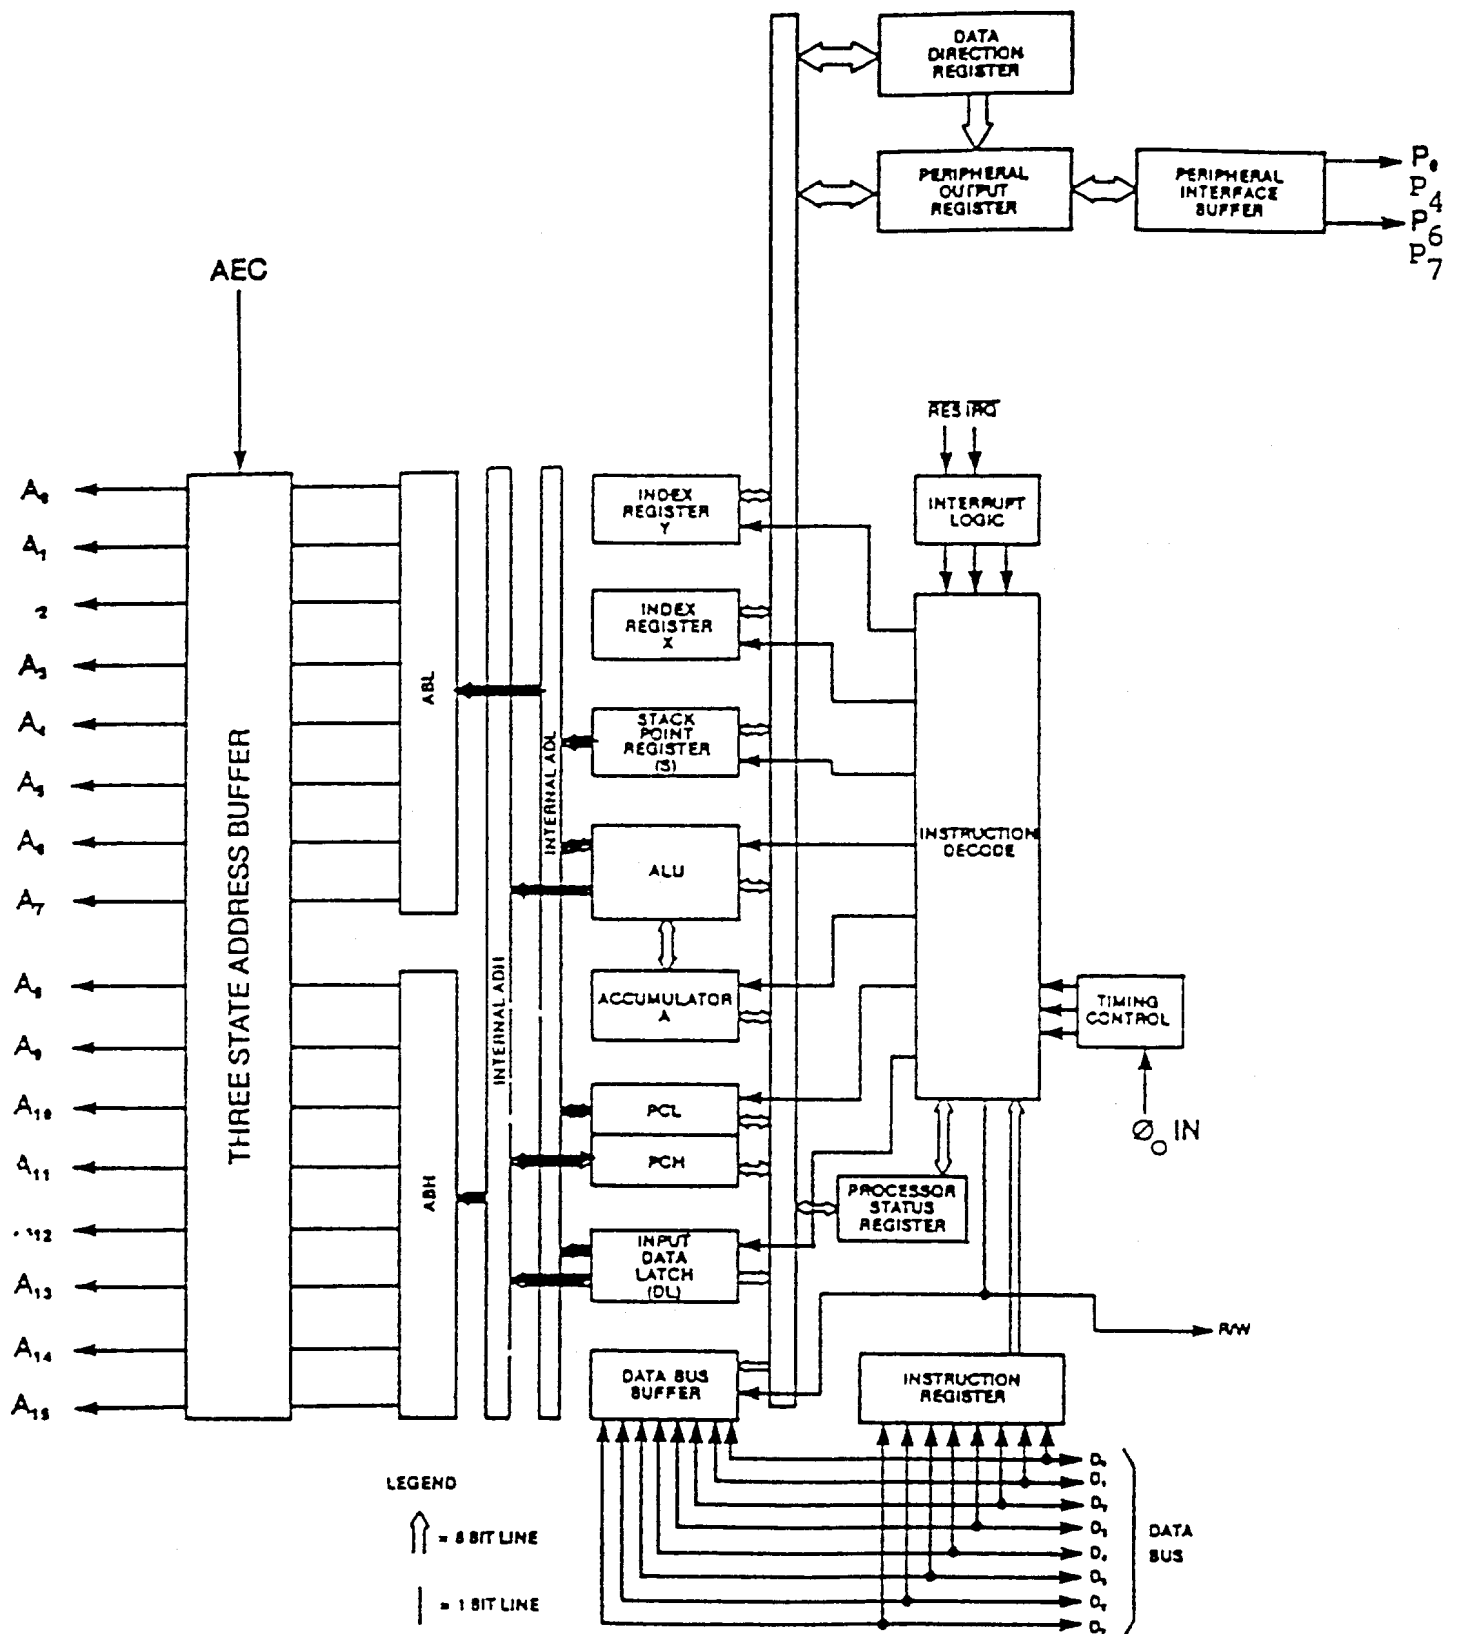

7501 BLOCK DIAGRAM

7501 CHARACTERISTICS

MAXIMUM RATINGS

RATING	SYMBOL	VALUE	UNIT
SUPPLY VOLTAGE	V _{CC}	-0.3 to +7.0	Vdc
INPUT VOLTAGE	V _{IN}	-0.3 to +7.0	Vdc
OPERATING TEMPERATURE	T _A	0 to +70	°C
STORAGE TEMPERATURE	T _{STG}	-55 to +150	°C

This device contains input protection against damage due to high static voltages or electric fields; however, precautions should be taken to avoid application of voltages higher than the maximum rating.

ELECTRICAL CHARACTERISTICS (V_{CC} = 5.0V ± 5%, V_{SS} = 0, T_A = 0° to +70°C)

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT
Input High Voltage					
ϕ_{in} (in)	V _{IH}	V _{SS} + 2.4	—	V _{CC}	
Input High Voltage RES. P, P, \overline{IPQ} , Data		V _{SS} + 2.2	—	—	Vdc
Input Low Voltage					
ϕ_{in} (in)	V _{IL}	V _{SS} - 0.3	—	V _{SS} + 0.5	Vdc
RES. P, P, \overline{IPQ} , Data		—	—	V _{SS} + 0.5	Vdc
Input Leakage Current (V _{IN} = 0 to 5.25V, V _{CC} = 5.25V) Logic	I _{IN}	—	—	25	μA
ϕ_{in} (in)		—	—	10.0	μA
Three State (Off State) Input Current (V _{IN} = 0.4 to 2.4V, V _{CC} = 5.25V) Data Lines	I _{TSI}	—	—	10	μA
Output High Voltage (I _{OH} = -100μA, V _{CC} = 4.75V) Data, AO-A15, RW, P, P,	V _{OH}	V _{SS} + 2.4	—	—	Vdc
Out Low Voltage (I _{OL} = 1.6mA, V _{CC} = 4.75V) Data, AO-A15, RW, P, P,	V _{OL}	—	—	V _{SS} + 0.5	Vdc
Power Supply Current	I _{CC}	—	125		mA
Capacitance V _{IN} = 0, T _A = 25°C, f = 1MHz Logic, P, P,	C				pF
C _{in}		—	—	10	
Data		—	—	15	
AO-A15, RW	C _{out}	—	—	12	
ϕ_{in}	C ϕ_{in}	—	30	50	
ϕ_{out}	C ϕ_{out}	—	50	80	

SIGNAL DESCRIPTION

Clocks (ϕ_o)

The 7501 requires a single low voltage input clock.

Address Bus (A_0-A_{11})

These outputs are TTL compatible, capable of driving one standard TTL load and 130 pf.

Data Bus (D_0-D_7)

Eight pins are used for the data bus. This is a Bi-Directional bus, transferring data to and from the device and peripherals. The outputs are tri-state buffers capable of driving one standard TTL load and 130 pf.

Reset

This input is used to reset or start the microprocessor from a power down condition. During the time that this line is held low, writing to or from the microprocessor is inhibited. When a positive edge is detected on the input, the microprocessor will immediately begin the reset sequence.

After a system initialization time of six clock cycles, the mask interrupt flag will be set and the microprocessor load the program counter from the memory vector locations FFEC and FFED. This is the start location for program control.

After Vcc reaches 4.75 volts in a power up routine, reset must be held low for at least two clock cycles. At this time the R/W signal will become valid.

When the reset signal goes high following these two clock cycles, the microprocessor will proceed with the normal reset procedure detailed above.

Interrupt Request (\overline{IRQ})

This TTL level input requests that an interrupt sequence begin within the microprocessor. The microprocessor will complete the current instruction being executed before recognizing the request. At that time, the interrupt mask bit in the Status Code Register will be examined. If the interrupt mask flag is not set, the microprocessor will begin an interrupt sequence. The Program Counter and Processor Status Register are stored in the stack. The microprocessor will then set the interrupt mask flag high so that no further interrupts may occur. At the end of this cycle, the program counter low will be loaded from address FFFE, and program counter high from location FFFF, therefore transferring program control to the memory vector located at these addresses.

Address Enable Control (AEC)

The Address Bus is valid only when the Address Enable Control line is high. When low, the Address Bus is in a high-impedance state. This feature allows easy DMA and multiprocessor systems.

I/O Port ($\overline{P_0}-P_7$)


Eight pins are used for the peripheral port, which can transfer data to or from peripheral devices. The Output Register is located in RAM at Address 0001, and the Data Direction Register is at Address 0000. The outputs are capable of driving one standard TTL load and 130 pf.

Read/Write (R/W)

This signal is generated by the microprocessor to control the direction of data transfers on the Data Bus. This line is high except when the microprocessor is writing to memory or a peripheral device.

Characteristics	Symbol	Min	Typ	Max	Units
Mux input high	TMH	60		110	ns
AEC setup time	TAEC	25		60	ns
Mux to RW setup or Tri-state	TMRWS			70	ns
Mux to RW hold	TMRWH	30			
Up data setup from PHO	TMDS			130	ns
Up write data hold	THW	60			
Up data setup from MUX	TMXDS			120	ns
Data bus in tri-state from MUX	TMXDT	30			
Data bus to tri-state from AEC	TAEDT			120	ns
Read data stable	TDSU	40			
Read data hold	THR	40			
Address setup from $PH\phi$	TADS	40		150	ns
Address hold	THA	40			
Address setup from AEC	TAADS			75	ns
Address tri-state from AEC	TAEAT			120	ns
Port input setup	TPDSU	105			ns
Port input half	TPDH	65			ns
Port output data valid	TPDW			195	ns
Cycle Time	TCYC	500			
ϕ (in) Pulse width (measured at 1.5V)	PWH ϕ	250		275	
ϕ (in) rise, fall time	TR ϕ , TF ϕ			10	
RDY setup time	TRDY	80			

7501 Clock Timing

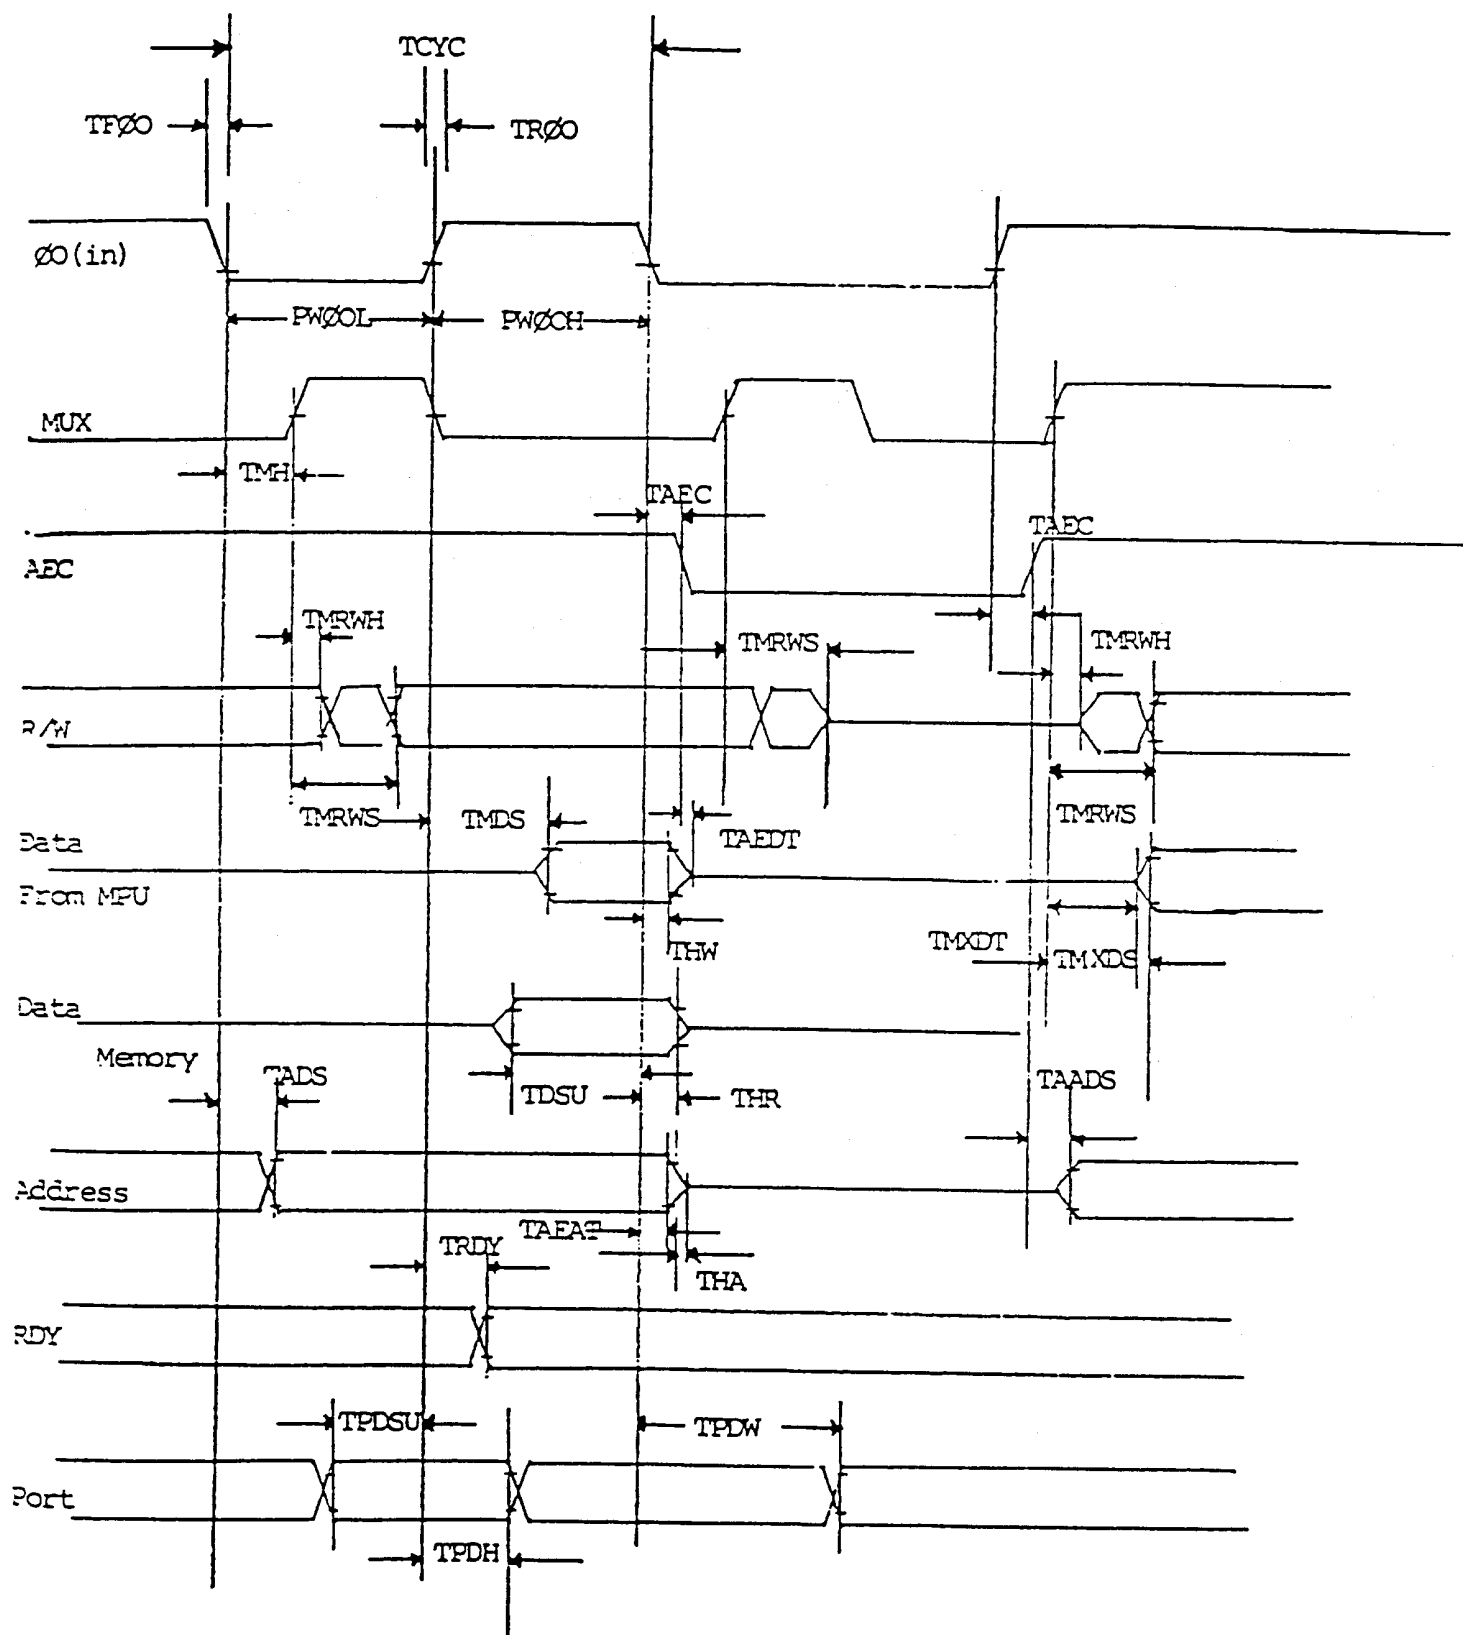

ADDRESSING MODES

ACCUMULATOR ADDRESSING—This form of addressing is represented with a one byte instruction, implying an operation on the accumulator.

IMMEDIATE ADDRESSING—In immediate addressing, the operand is contained in the second byte of the instruction, with no further memory addressing required.

ABSOLUTE ADDRESSING—In absolute addressing, the second byte of the instruction specifies the eight low order bits of the effective address while the third byte specifies the eight high order bits. Thus, the absolute addressing mode allows access to the entire 65K bytes of addressable memory.

ZERO PAGE ADDRESSING—The zero page instructions allow for shorter code and execution times by only fetching the second byte of the instruction and assuming a zero high address byte. Careful use of the zero page can result in significant increase in code efficiency.

INDEXED ZERO PAGE ADDRESSING—(X, Y indexing)—This form of addressing is used in conjunction with the index register and is referred to as "Zero Page, X" or "Zero Page, Y." The effective address is calculated by adding the second byte to the contents of the index register. Since this is a form of "Zero Page" addressing, the content of the second byte references a location in page zero. Additionally, due to the "Zero Page" addressing nature of this mode, no carry is added to the high order 8 bits of memory and crossing of page boundaries does not occur.

INDEXED ABSOLUTE ADDRESSING—(X, Y indexing)—This form of addressing is used in conjunction with X and Y index register and is referred to as "Absolute, X," and "Absolute, Y." The effective address is formed by adding the contents of X and Y to the address contained in the second and third bytes of the instruction. This mode allows the index register to contain the index or count value and the instruction to contain the base address. This type of indexing allows any location referencing and the index to modify multiple fields resulting in reduced coding and execution time.

IMPLIED ADDRESSING—In the implied addressing mode, the address containing the operand is implicitly stated in the operation code of the instruction.

RELATIVE ADDRESSING—Relative addressing is used only with branch instructions and establishes a destination for the conditional branch.

The second byte of the instruction becomes the operand which is an "Offset" added to the contents of the lower eight bits of the program counter when the counter is set at the next instruction. The range of the offset is -128 to +127 bytes from the next instruction.

INDEXED INDIRECT ADDRESSING—In indexed indirect addressing (referred to as [Indirect, X]), the second byte of the instruction is added to the contents of the X index register, discarding the carry. The result of this addition points to a memory location on page zero whose contents is the low order eight bits of the effective address. The next memory location in page zero contains the high order eight bits of the effective address. Both memory locations specifying the high and low order bytes of the effective address must be in page zero.

INDIRECT INDEXED ADDRESSING—In indirect indexed addressing (referred to as [Indirect, Y]), the second byte of the instruction points to a memory location in page zero. The contents of this memory location is added to the contents of the Y index register, the result being the low order eight bits of the effective address. The carry from this addition is added to the contents of the next page zero memory location, the result being the high order eight bits of the effective address.

ABSOLUTE INDIRECT—The second byte of the instruction contains the low order eight bits of a memory location. The high order eight bits of that memory location is contained in the third byte of the instruction. The contents of the fully specified memory location is the low order byte of the effective address. The next memory location contains the high order byte of the effective address which is loaded into the sixteen bits of the program counter.

INSTRUCTION SET—ALPHABETIC SEQUENCE

ADC Add Memory to Accumulator with Carry
AND "AND" Memory with Accumulator
ASL Shift Left One Bit (Memory or Accumulator)

BCC Branch on Carry Clear
BCS Branch on Carry Set
BEQ Branch on Result Zero
BIT Test Bits in Memory with Accumulator
BMI Branch on Result Minus
BNE Branch on Result not Zero
BPL Branch on Result Plus
BRK Force Break
BVC Branch on Overflow Clear
BVS Branch on Overflow Set

CLC Clear Carry Flag
CLD Clear Decimal Mode
CLI Clear Interrupt Disable Bit
CLV Clear Overflow Flag
CMP Compare Memory and Accumulator
CPX Compare Memory and Index X
CPY Compare Memory and Index Y

DEC Decrement Memory by One
DEX Decrement Index X by One
DEY Decrement Index Y by One

EOR "Exclusive-or" Memory with Accumulator

INC Increment Memory by One
INX Increment Index X by One
INY Increment Index Y by One

JMP Jump to New Location
JSR Jump to New Location Saving Return Address

LDA Load Accumulator with Memory
LDX Load Index X with Memory
LDY Load Index Y with Memory
LSR Shift One Bit Right (Memory or Accumulator)

NOP No Operation

ORA "OR" Memory with Accumulator


PHA Push Accumulator on Stack
PHP Push Processor Status on Stack
PLA Pull Accumulator from Stack
PLP Pull Processor Status from Stack

ROL Rotate One Bit Left (Memory or Accumulator)
ROR Rotate One Bit Right (Memory or Accumulator)
RTI Return from Interrupt
RTS Return from Subroutine

SBC Subtract Memory from Accumulator with Borrow
SEC Set Carry Flag
SED Set Decimal Mode
SEI Set Interrupt Disable Status
STA Store Accumulator in Memory
STX Store Index X in Memory
STY Store Index Y in Memory

TAX Transfer Accumulator to Index X
TAY Transfer Accumulator to Index Y
TSX Transfer Stack Pointer to Index X
TXA Transfer Index X to Accumulator
TXS Transfer Index X to Stack Register
TYA Transfer Index Y to Accumulator


PROGRAMMING MODEL

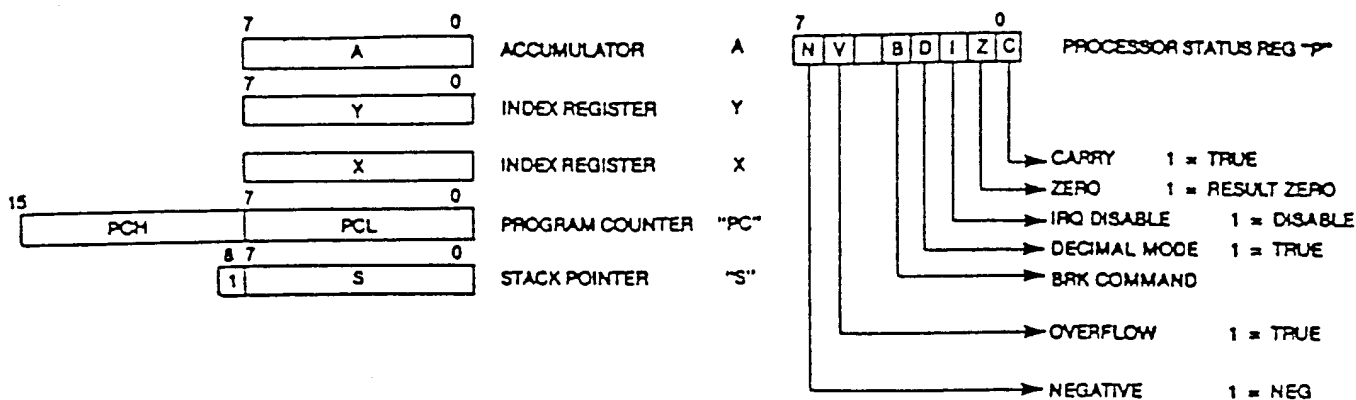

INSTRUCTION SET – OP CODES, Execution Time, Memory Requirements

[illegible]

Note: Commodore Semiconductor Group cannot assume liability for the use of undefined OP Codes

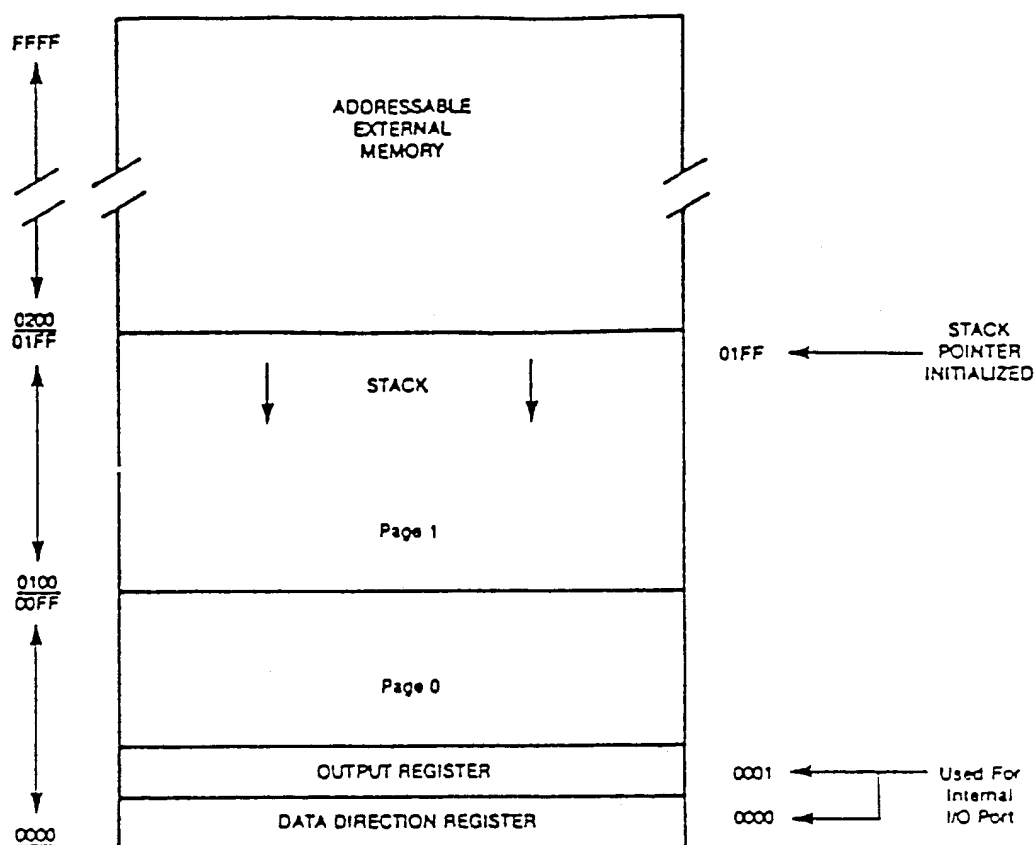

7501 MEMORY MAP

APPLICATIONS NOTES

Locating the Output Register at the internal I/O Port in Page Zero enhances the powerful Zero Page Addressing instructions of the 7501.

By assigning the I/O Pins as inputs (using the Data Direction Register) the user has the ability to change the contents of address 0001 (the Output Register) using peripheral devices. The ability to change these contents using peripheral inputs, together with Zero Page Indirect Addressing instructions, allows novel and versatile programming techniques not possible earlier.